

# SOLAR MODULE EGE-140P-36 POLYCRYSTALLINE MODULE

140 W / 36 Cells / 5 Bus bars



Eco Green Energy's modules are only made of grade A solar cells with a very high efficiency and ensured more than 25 years lifespan.

## KEY FEATURES



5 bus bars cells, with efficiency up to 21 %



IP67 junction box for long term weather endurance



High quality aluminum frame, resisting load up to 5400 Pa and wind pressure up to 2400 Pa



High transmissivity, low-iron tempered glass



High performance in low-light environment



Double EL test before and after lamination



**25 YEARS** OUTPUT POWER WARRANTY




**12 YEARS** PRODUCT WARRANTY

## CERTIFICATES

IEC 61215 / IEC 61730 / CE  
ISO 9001:2015

## LINEAR PERFORMANCE WARRANTY

12-Year Product Warranty · 25-Year Linear Power Warranty

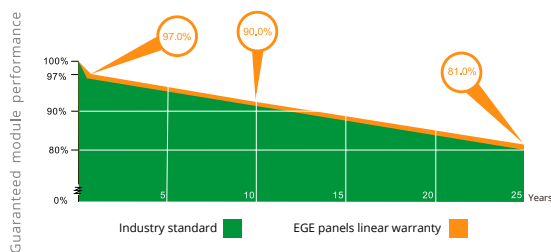

## ELECTRICAL DATA AT STC\*

Power output (Pmax)	140 W
Power tolerance	0~+3 %
Module efficiency	15.48 %
Maximum power voltage (Vmp)	18.51 V
Maximum power current (Imp)	7.56 A
Open circuit voltage (Voc)	22.71 V
Short circuit current (Isc)	8.09A

\*Standard Test Conditions: Irradiance: 1 000 W / m<sup>2</sup>  
Cell temperature: 25 °C • AM: 1.5

## ELECTRICAL DATA AT NOCT\*

Power output (Pmax)	103.57 W
Maximum power voltage (Vmp)	17.09 V
Maximum power current (Imp)	6.05 A
Open circuit voltage (Voc)	21.08 V
Short circuit current (Isc)	6.57 A

\*Nominal Operating Cell Temperature: Irradiance: 800 W / m<sup>2</sup>  
Ambient temperature: 20 °C • AM: 1.5 • Wind speed: 1 m/s

## TEMPERATURE CHARACTERISTICS

NOCT	45 °C ±2 °C
Temperature coefficient of Pmax	-0.41%/°C
Temperature coefficient of Voc	-0.31%/°C
Temperature coefficient of Isc	+0.06%/°C


## MAXIMUM RATINGS

Operating temperature range	-45 °C ~+85 °C
Maximum system voltage	1500 V
Max series fuse rating	20 A
Max front load (e.g.: snow)	5400 Pa
Max back load (e.g.: wind)	2400 Pa


## MECHANICAL CHARACTERISTICS

Cell type	Polycrystalline (156.75x140 mm)
Number of cells	36
Dimensions	1330x680x30mm
Weight	10.0kg
Glass	3.2 mm tempered glass
Frame	Anodized aluminium alloy
Junction box	IP67
Cable	0.9 m
Connector	MC4 or MC4 compatible

## CURVES

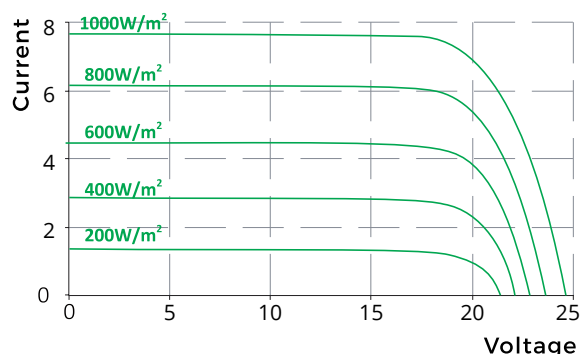

## ENGINEERING DRAWINGS (mm)

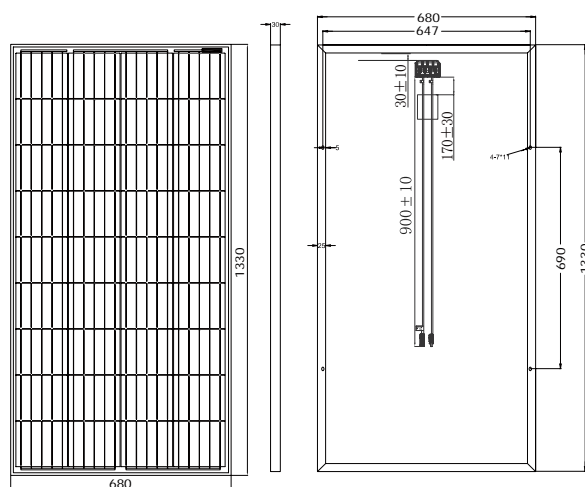

## PACKAGING

Type	Pcs/ Type	Weight
Per Box	2 pcs	21 kg
20ft GP Container	811 pcs	8.5 t
40ft GP Container	1732 pcs	18.1 t
40ft HQ Container	1917 pcs	20.1 t